

2-skäriga, för aluminium

MG

Obelagd

Hårdmetall supermicrograin

Tolerans

D 1,0 - 5,0 +0 / -0,020

D 6,0 - 7,0 +0 / -0,025

D 8,0 - 9,0 +0 / -0,030

D 10,0 - 12,0 +0 / -0,035

Skaft


Cylindrisk h6, DIN6535 HA

Spårutförande

45° högerspiral, borrarande ändskär

Användningsområde

Aluminium

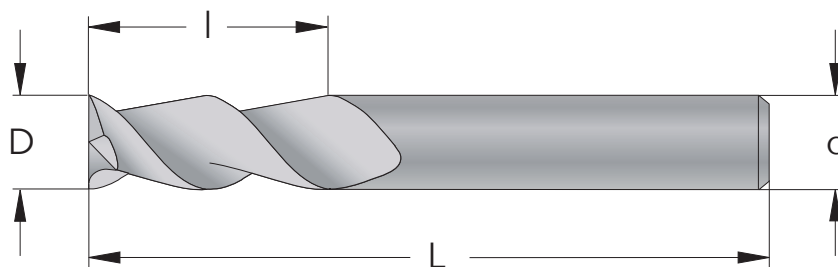

D mm	d mm	Artikel	l mm	L mm	Antal skär	Pris/st SEK
2,0	6	MA0602B6_MG	6	57	2	224,00
3,0	6	MA0603B8_MG	8	57	2	224,00
4,0	6	MA0604B11_MG	11	57	2	224,00
5,0	6	MA0605B13_MG	13	57	2	224,00
6,0	6	MA0606B16_MG	16	57	2	224,00
8,0	8	MA0808B20_MG	20	63	2	356,00
10,0	10	MA1010B25_MG	25	72	2	544,00
12,0	12	MA1212B30_MG	30	83	2	687,00



MG

Obelagd

Hårdmetall supermicrograin

Tolerans

D 1,0 - 5,0 +0 / -0,020

D 6,0 - 7,0 +0 / -0,025

D 8,0 - 9,0 +0 / -0,030

D 10,0 - 12,0 +0 / -0,035

Skaft


Cylindrisk h6, DIN6535 HA

Spårutförande

50° högerspiral, borrarande ändskär

Användningsområde

Aluminium

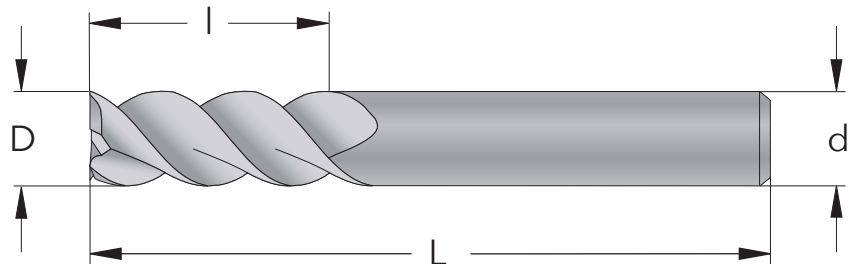

D mm	d mm	Artikel	l mm	L mm	Antal skär	Pris/st SEK
2,0	6	MA0602C6_MG	6	57	3	224,00
3,0	6	MA0603C8_MG	8	57	3	224,00
4,0	6	MA0604C11_MG	11	57	3	224,00
5,0	6	MA0605C13_MG	13	57	3	224,00
6,0	6	MA0606C16_MG	16	57	3	224,00
8,0	8	MA0808C20_MG	20	63	3	356,00
10,0	10	MA1010C25_MG	25	72	3	544,00
12,0	12	MA1212C30_MG	30	83	3	687,00



Vågformade skrubbfräsar, för aluminium

MG

Obelagd

Hårdmetall supermicrograin

Tolerans

D 6,0 - 7,0 +0 / -0,025

D 8,0 - 9,0 +0 / -0,030

D 10,0 - 12,0 +0 / -0,035

Skaft


Cylindrisk h6, DIN6535 HA

Spårutförande

45° högerspiral, borrande ändskär

Användningsområde

Aluminium

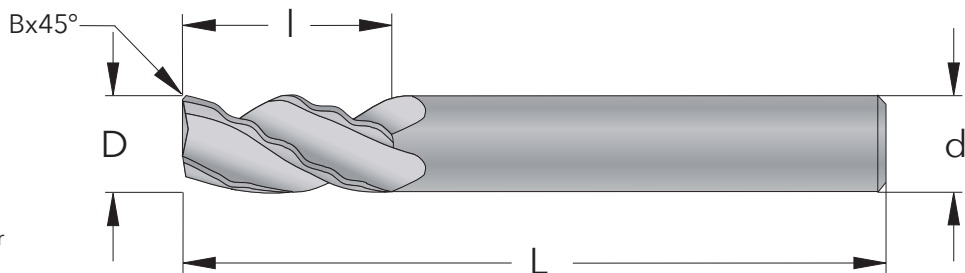

D mm	d mm	B mm	Artikel	l mm	L mm	Antal skär	Pris/st SEK
6,0	6	0,2	FWA0606C16_MG	16	57	3	525,00
8,0	8	0,25	FWA0808C20_MG	20	63	3	699,00
10,0	10	0,3	FWA1010C25_MG	25	72	3	918,00
12,0	12	0,3	FWA1212C30_MG	30	83	3	1204,00

Liten fas ger
längre livslängd

Stort spånutrymme
för aluminium

Vågformad skärkant
ger hög avverkning

