

4-skäriga

LC
AlCrN-belagd
Hårdmetall supermicrograin

Tolerans

D 1,0 - 5,0 +0 / -0,020
D 6,0 - 7,0 +0 / -0,025
D 8,0 - 9,0 +0 / -0,030
D 10,0 - 12,0 +0 / -0,035
D 16,0 - 20,0 +0 / -0,040

Skaft


Cylindrisk h6, DIN6535 HA

Spårförande

35° högerspiral, borrarande ändskär

Användningsområde

Alla typer av stål upp till HRC55

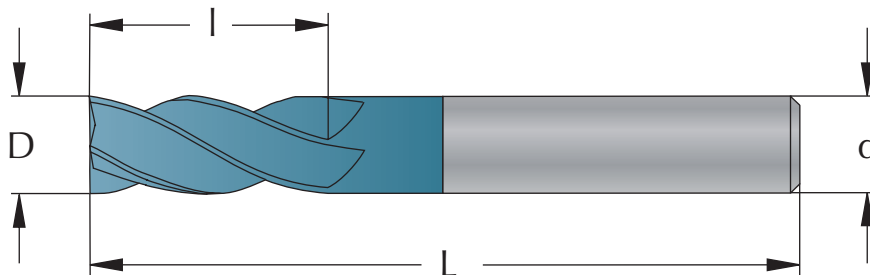

D mm	d mm	Artikel	l mm	L mm	Antal skär	Pris/st SEK
2,0	4	M0402D6_LC	6	50	4	179,00
3,0	4	M0403D8_LC	8	50	4	179,00
3,0	6	M0603D8_LC	8	57	4	239,00
4,0	4	M0404D11_LC	11	50	4	179,00
4,0	6	M0604D11_LC	11	57	4	239,00
5,0	6	M0605D13_LC	13	57	4	239,00
6,0	6	M0606D16_LC	16	57	4	239,00
6,0	6	M0606D26_LC	26	72	4	349,00 NY
7,0	8	M0807D18_LC	18	63	4	323,00 NY
8,0	8	M0808D20_LC	20	63	4	323,00
8,0	8	M0808D32_LC	32	83	4	512,00 NY
10,0	10	M1010D25_LC	25	72	4	476,00
10,0	10	M1010D40_LC	40	92	4	700,00 NY
12,0	12	M1212D30_LC	30	83	4	664,00
12,0	12	M1212D48_LC	48	100	4	980,00 NY
16,0	16	M1616D34_LC	34	92	4	1049,00 NY
20,0	20	M2020D40_LC	40	100	4	1798,00 NY

